REV	ECRN	DATE
1	NEW PRODUCTION	20141113
2	印字内容变更	20150608

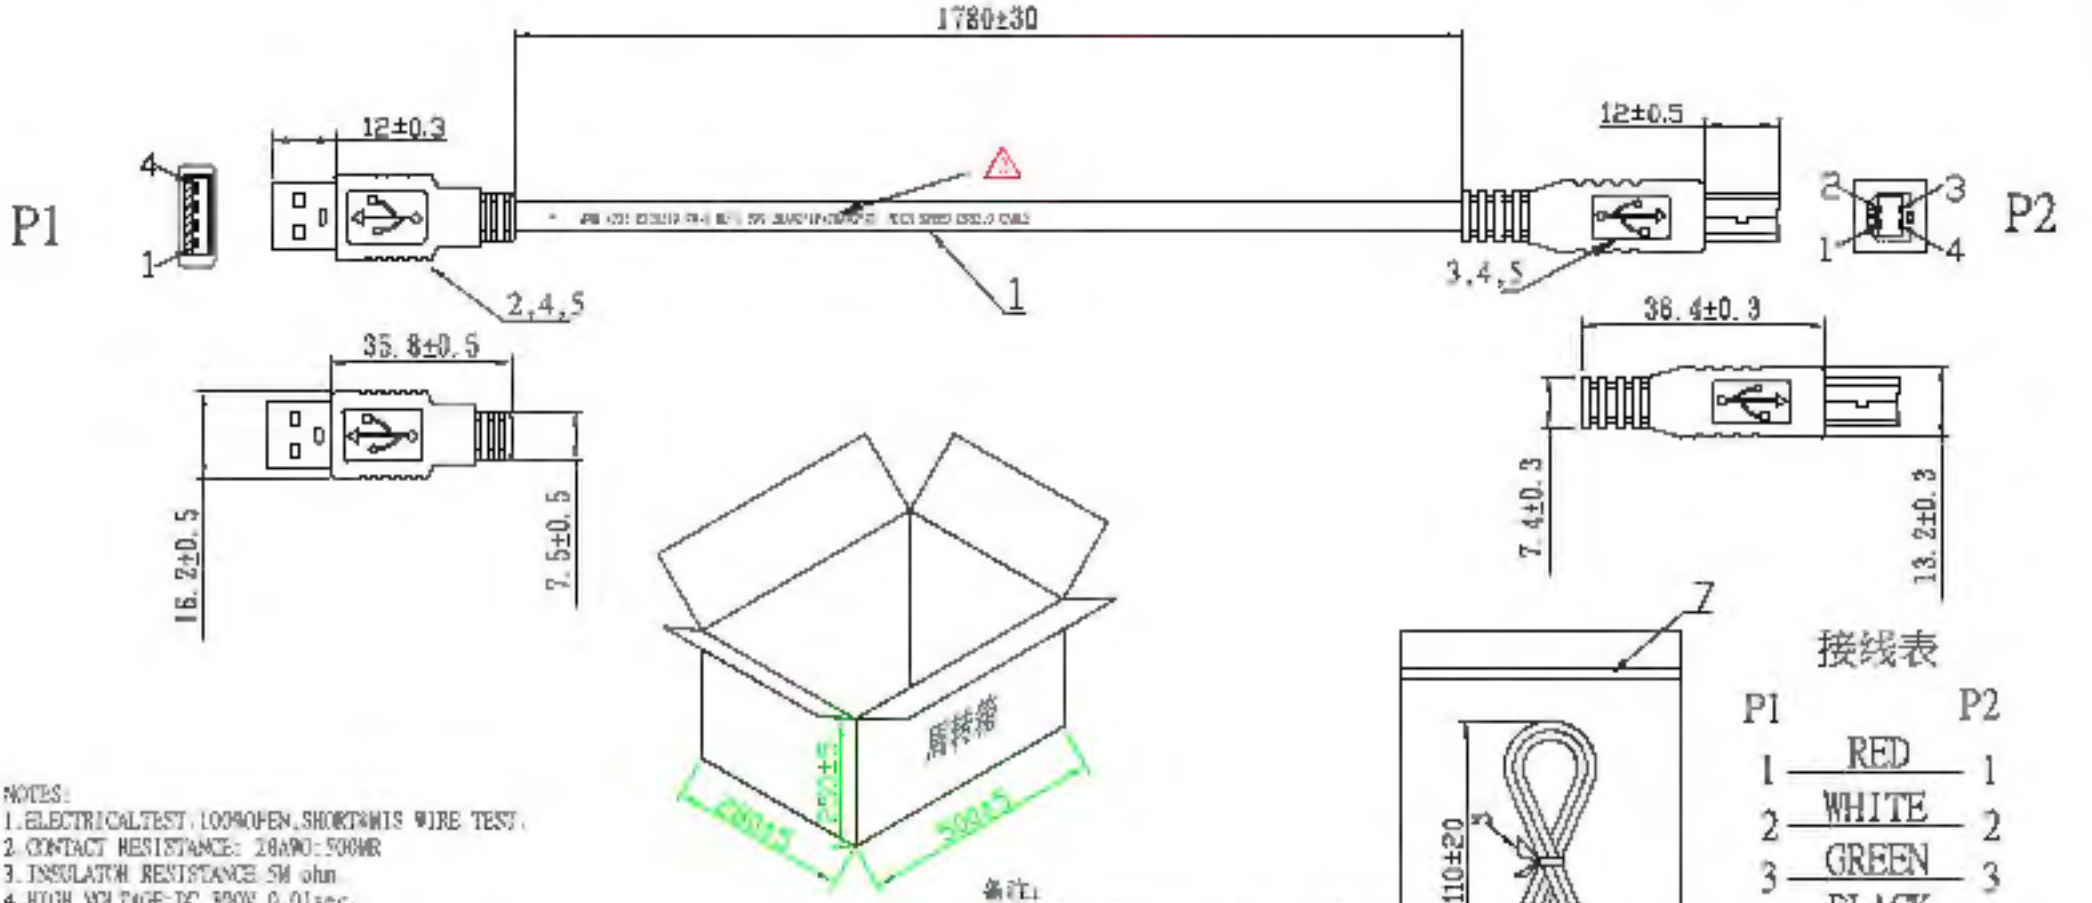

接线表

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL	SHELL	SHELL

NOTES:
1. ELECTRICAL TEST: 100%OPEN, SHORT&MIS WIRE TEST.
2. CONTACT RESISTANCE: 28AWG: 50MΩ
3. INSULATION RESISTANCE 5M ohm
4. HIGH VOLTAGE: DC 300V 0.01sec.
5. MUST BE ROHS COMPLIANT.

备注:
1. 把装好产品后的100*150 PE袋装入内箱;
2. 每内箱装300个100*150小PE袋共300PCS产品;

NO.	PART NO	ITEM	DESCRIPTION	QTY	UNIT
⑦	D.100150.03013	PE BAG	100*150*0.05MM Red edge chain bag	1	PCS
⑥	I.000001.04G0R	TIE	L=100mm COLOR BLACK	1	PCS
⑤	I.000008.05006	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
④	C.045001.0100H	MOLDING	PVC 45P BLACK	13.6	G
③	B.010040.04012	CONNECTOR	USB B/M 4P PIN GOLDED PLATED SHELL NICKEL PLASTIC WHITE	1	PCS
②	B.010040.0401R	CONNECTOR	USB A/M 4P PIN GOLDED PLATED SHELL NICKEL PLASTIC MOUTH	1	PCS
①	A.011301.0402R	CABLE	(UL2725 28AWG(7/0.12TC)*1P+28AWG(7/0.12TC)*2C+AL+B(32/0.10CCAW) JACKET PVC 60P BLACK OD:4.0±0.1MM L=1840MM±10MM	1	PCS

RoHS COMPLIANT

DRAWN BY	谢建军	20150608
CHECKED BY		
APPROVED BY		

朋联电子有限公司
DongGuan PengLian Electronics Co.,Ltd
TEL:0769-88835058/88835035 FAX:0769-88835001

比例: FREE	TITLE: USB A/M TO USB B/M
单位: mm	SUPPLIER'S ITEM: 9.00ACCA0545.000R
	CUSTOMER: Seeed Technology Limited
	CUSTOMER'S ITEM: 321010025
	DRAWING NO. ACCA-0545 DATE 2015.06.08